

KM-501M_H

SLIM-LINE MODULAR CRESCENT CUBER

Item # _____

Project: _____

Qty: _____
*AutoCad available on KCL

KM-501M_H


12/06

Item # 13183


CUBER DIMENSIONS

W x D x H


KM-501M_H
22 x 27^{3/8} x 30^{5/16}




B-300




B-500



B-700



B-800



B-900

Also available on Large Bins:
B-1150SS
B-1300SS
B-1500SS
B-1650SS

KM-501MAH

Air-Cooled
Shown on an optional
B-300

KM-501MWH

Water-Cooled

KM-501MRH

Remote Air-Cooled



- Up to 498 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Individual crescent cube
- Protected by *HoshiGuard* Antimicrobial Agent **HOSHIGUARD**
- CycleSaver® Design **CYCLESaver**
- EverCheck® alert system **evercheck**
- Stainless steel evaporator
- Mount two units side-by-side, in only 44" of floor space, for 996 lbs. per 24 hours
- Removable air filters (Air-cooled models only)
- KM-501MRH complies with California Energy Commission guidelines (CEC)
- R-404A Refrigerant



Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts & Labor on: Evaporator.

Five Year - Parts on: Compressor, air-cooled condenser coil.



KM-50IM_H SLIM-LINE MODULAR CRESCENT CUBER

DIMENSIONS
W x D x H
KM-50IM_H
22 x 27^{3/8} x 30^{5/16}

- Air-cooled
- Water-cooled
- Remote Air-cooled

AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	498	474	433
80°	480	442	397
90°	474	416	372

WATER-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	498	495	465
80°	496	491	447
90°	495	488	449

AIR-COOLED REMOTE

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	482	475	437
80°	476	465	412
90°	475	457	410

UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle	KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs. Cubes	90/70		
KM-501MAH	9.5 480	7.0	21.3	N/A
KM-501MWH	9.5 480	5.3	20.8	137
KM-501MRH	9.5 480	6.6	19.6	N/A

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-501MAH	Air-Cooled	13.0	20	175 lbs.
KM-501MWH	Water-Cooled	10.0	20	175 lbs.
KM-501MRH	Remote Air-Cooled	15.0	20	175 lbs.

STORAGE BINS

Model Number	Application Capacity	ARI-Rated Capacity
B-300	300 lbs.	260 lbs.
B-500	500 lbs.	360 lbs.
B-700	700 lbs.	550 lbs.
B-800	800 lbs.	600 lbs.
B-900	900 lbs.	660 lbs.
B-1150	1150 lbs.	N/A
B-1300	1275 lbs.	N/A
B-1500	1490 lbs.	N/A
B-1650	1605 lbs.	N/A



ELECTRICAL & PLUMBING/KM-50IM_H

- 115V/60/1
- 20 Amp Max Fuse/HACR Breaker Size
- 1/2" FPT water inlet
- 3/4" FPT water drain




© HOSHIZAKI AMERICA, INC.


618 Hwy. 74 S., Peachtree City, GA 30269

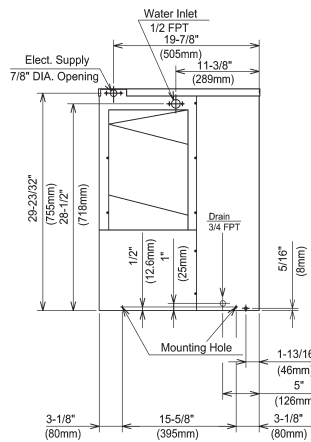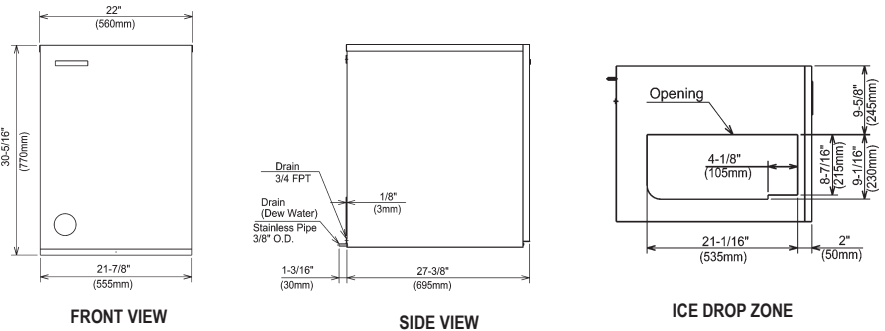

AIR-COOLED UNIT

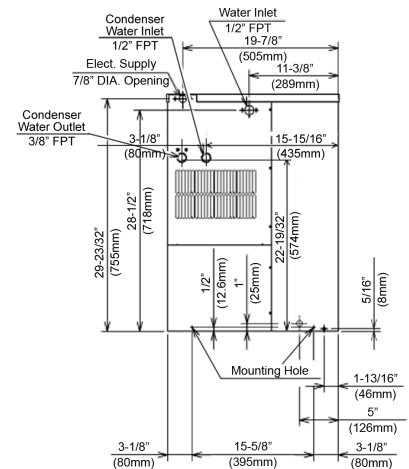


WATER-COOLED UNIT

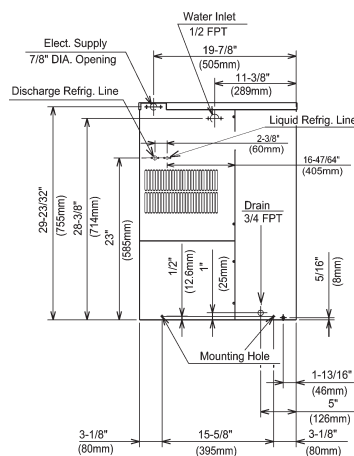

REMOTE AIR-COOLED UNIT

URC-6F Remote Condenser (Sold Separately)
For Use with KM-501MRH

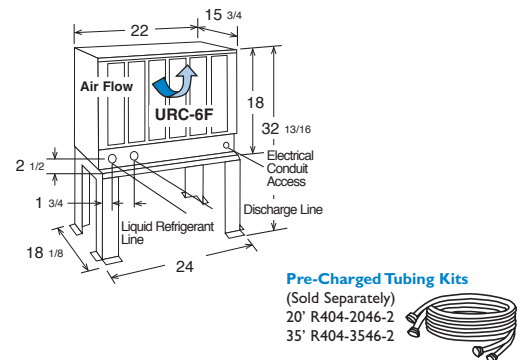

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters. (Air-cooled models only)



TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.